



PLATFORM
& TIPPER

The company



As a specialist for individual niche products and an expert in the field of custom trailer construction, we at UNSINN Fahrzeugtechnik GmbH have been offering suitable solutions for even the most demanding of tasks since 1958. We are an innovative manufacturer of car trailers of unique quality and guarantee our customers stable value with best quality "Made in Germany". Thanks to our in-house research, development and construction, we not only stand for the fulfilment of individual customer wishes but also set benchmarks in terms of workmanship and durability. The high level of customer satisfaction and numerous official awards serve as incentive and mandate for the continual further development of our trailers. UNSINN trailers feature impressive stability and comfortable handling characteristics and offer you maximum functionality and ease of maintenance. More and more satisfied customers both at home and abroad have come to appreciate how much it pays off to have a "real Unsinn" hitched up. Come on a visit and see for yourself!

Regards,
Rosa and Josef Unsinn



Table of contents



Platform trailer type P

Page 6-9



Platform trailer type GP/GTP

Page 10-17




Turntable trailer type GDP

Page 18-25




Long material trailer type LM

Page 26-29



Rear tipper type PHK

Page 30-33




Rear tipper type UHK/three-way tipper type UDK

Page 34-39

Special equipment/accessories


Page 40-41

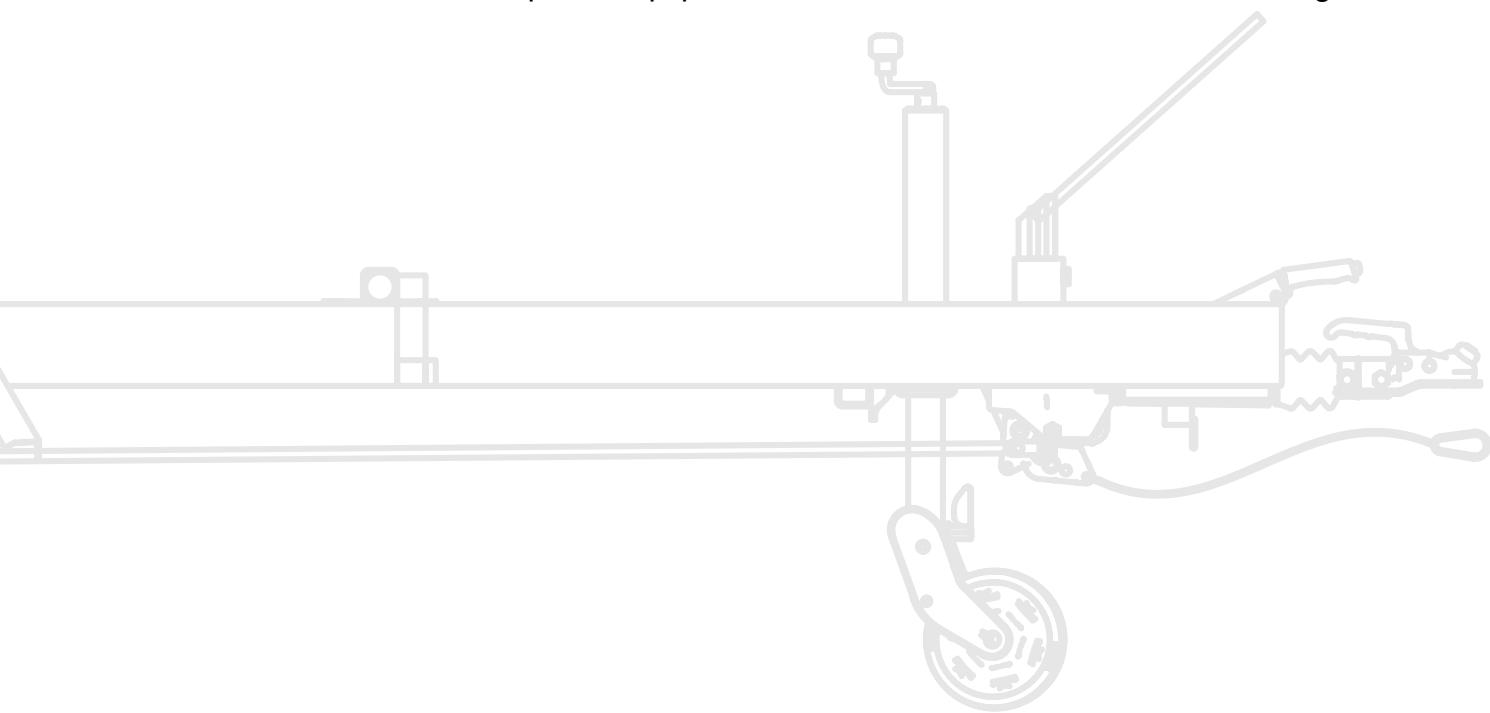

What makes a difference? Our unique quality!

Frame:

Top stability thanks to the fully welded frame rail structure which has been hot galvanised in a dipping bath. The frames are adapted to the respective tyre sets to guarantee optimum loading height as well as smooth and safe driving behaviour. Individual customer wishes as well as the best payload ratio between unladen weight and stability are also decisive.

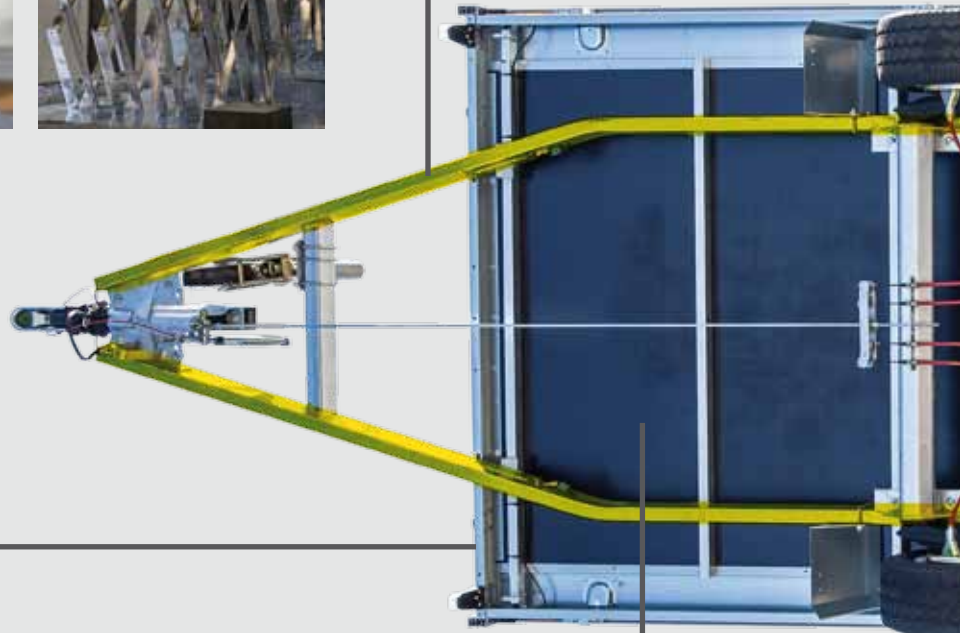

Panels:

Completely drop-down and removable aluminium panels for versatile loading options with sturdy and rust-resistant fasteners made of stainless steel.



Flooring:

Load floor made of multi-glued screen-printed plywood (18 mm) or completely of galvanised sheet steel for convenient unloading and easy cleaning.



At the heart of every UNSINN trailer is the fully welded base and undercarriage frame. From the hitching point to the lighting rail made of one continuous hollow profile (marked yellow on the illustration) and cross members, and then hot galvanised in a dipping bath. For our standard production, only high-quality and established components which meet our demands are used. That makes our trailers into an incomparable benchmark for stability, durability and quality on the market.

Load securing:

Recessed lashing points in the load floor and additional lashing rings fitted under the platform with 600 kg tensile strength each for flexible and straightforward load securing.



Electric system:

Lamps with 13-pole connector and cable conduit are installed protected (cable conduit in the hollow profile). This reduces maintenance costs and increases service life.



Accessories:

We offer a large selection of matching accessories for all of our trailers in order to meet all requirements.



Safety:

High-quality axle and brake components from renowned manufacturers. Automatic readjustment of the brake for safe driving behaviour and a shorter braking distance is a standard feature.



Platform trailer type P



Internal dimensions L x W x H	perm. GVW	Tyres	Loading height	Payload	External dimensions L x W
2300 x 1500 x 300 mm	750 kg	10"	570 mm	515 kg	3500 x 1570 mm
	1350 kg	13"	640 mm	1080 kg	3570 x 1570 mm
		10"	570 mm	1080 kg	3570 x 1570 mm
	1500 kg	13"	640 mm	1225 kg	3570 x 1570 mm
		10"	570 mm	1225 kg	3570 x 1570 mm
		10"	570 mm	1225 kg	3570 x 1570 mm
2760 x 1500 x 300 mm	1350 kg	13"	640 mm	1055 kg	4030 x 1570 mm
		10"	570 mm	1055 kg	4030 x 1570 mm
	1500 kg	13"	640 mm	1205 kg	4030 x 1570 mm
		10"	570 mm	1205 kg	4030 x 1570 mm



The type P platform trailer is the ideal car trailer for private use. High stability, simple handling as well as a useful selection of matching accessories make this trailer a real all-rounder.

4-6 recessed lashing points in the load floor and an additional 4-6 lashing rings fitted under the platform with 600 kg tensile strength each for flexible load securing.

Sturdy and rust-resistant fasteners made of stainless steel for excellent durability.



Completely drop-down and removable aluminium panels for versatile loading options.

Lamps and cable conduit are installed protected (cable conduit in the hollow profile). This reduces maintenance costs and increases service life.



Pluggable steel corner stakes



Aluminium panel extension



Drop-down aluminium panels



Lashing ring under the load floor



Sturdy drawbar castor wheel



Canvas and frame with various loading heights



Recessed lashing point



Long-lasting stainless steel fastener



Light goods panel extension with retainers for net or flat canvas



Two-row H-frame



P 823-10-1500 unbraked



Aluminium lid with cross member for variable fastening options



One-piece flooring



Lighting with reversing light

Platform trailer type GP/GTP



Internal dimensions L x W x H	perm. GVW	Tyres	Loading height	Payload	External dimensions L x W
2760 x 1500 x 350 mm	1500 kg	10"	570 mm	1150 kg	4140 x 1560 mm
	2000 kg	13"	690 mm	1550 kg	4140 x 1560 mm
		10"	570 mm	1570 kg	4140 x 1560 mm
	2600 kg	14"	700 mm	2110 kg	4140 x 1560 mm
		13"	630 mm	2170 kg	4140 x 1560 mm
		10"	570 mm	2170 kg	4140 x 1560 mm
	3000 kg	14"	760 mm	2520 kg	4140 x 1560 mm
		13"	630 mm	2560 kg	4140 x 1560 mm
		10"	570 mm	2560 kg	4140 x 1560 mm
3060 x 1750 x 350 mm	2000 kg	13"	690 mm	1520 kg	4440 x 1810 mm
		10"	570 mm	1570 kg	4440 x 1810 mm
	2600 kg	14"	700 mm	2100 kg	4440 x 1810 mm
		13"	630 mm	2140 kg	4440 x 1810 mm
		10"	570 mm	2140 kg	4440 x 1810 mm
	3000 kg	14"	760 mm	2490 kg	4440 x 1810 mm
		13"	630 mm	2530 kg	4440 x 1810 mm
		10"	570 mm	2530 kg	4440 x 1810 mm
	3500 kg	14"	780 mm	2910 kg	4460 x 1810 mm
		13"	640 mm	2930 kg	4460 x 1810 mm
3060 x 2040 x 350 mm	2000 kg	13"	690 mm	1510 kg	4440 x 2100 mm
		10"	570 mm	1540 kg	4440 x 2100 mm
	2600 kg	14"	700 mm	2080 kg	4440 x 2100 mm
		13"	630 mm	2110 kg	4440 x 2100 mm
		10"	570 mm	2110 kg	4440 x 2100 mm
	3000 kg	14"	760 mm	2460 kg	4440 x 2100 mm
		13"	630 mm	2490 kg	4440 x 2100 mm
		10"	570 mm	2490 kg	4440 x 2100 mm
	3500 kg	14"	780 mm	2860 kg	4460 x 2100 mm
		13"	640 mm	2880 kg	4460 x 2100 mm

! Numerous sizes, weights and frames adapted to tyre set size as standard. Our platform trailers offer the right solution for numerous areas of application. Thanks to the comprehensive range of accessories and flexible special equipment options, there are no limits to your ideas and wishes.

6-8 recessed lashing points in the load floor and an additional 6-8 lashing rings fitted under the platform with 600 kg tensile strength each for flexible load securing.

Completely drop-down and removable aluminium panels for versatile loading options with sturdy and rust-resistant fasteners made of stainless steel.

Side marker, clearance lights and contour lamps using LED technology with powerful luminance and a long service life.



Sturdy automatic drawbar castor wheel (500 kg) on the welded castor wheel stabiliser, mounted on the inner side for safe parking and easy manoeuvring.

Lamps and cable conduit are installed protected (cable conduit in the hollow profile). This reduces maintenance costs and increases service life.

High-quality axle and brake components from renowned manufacturers. Automatic readjustment of the brake for safe driving behaviour and a shorter braking distance



Panels with central stakes (from internal length of 5460 mm) Pluggable steel corner stakes

Internal dimensions L x W x H	perm. GVW	Tyres	Loading height	Payload	External dimensions L x W
3660 x 1750 x 350 mm	2000 kg	13"	690 mm	1500 kg	5040 x 1810 mm
		10"	570 mm	1520 kg	5040 x 1810 mm
	2600 kg	14"	700 mm	2070 kg	5040 x 1810 mm
		13"	630 mm	2095 kg	5040 x 1810 mm
		10"	570 mm	2095 kg	5040 x 1810 mm
	3000 kg	14"	760 mm	2440 kg	5040 x 1810 mm
		13"	630 mm	2480 kg	5040 x 1810 mm
		10"	570 mm	2480 kg	5040 x 1810 mm
	3500 kg	14"	780 mm	2870 kg	5060 x 1810 mm
		13"	640 mm	2880 kg	5060 x 1810 mm
3660 x 2040 x 350 mm	2000 kg	13"	690 mm	1450 kg	5040 x 2100 mm
		10"	570 mm	1480 kg	5040 x 2100 mm
	2600 kg	14"	700 mm	2030 kg	5040 x 2100 mm
		13"	630 mm	2060 kg	5040 x 2100 mm
		10"	570 mm	2060 kg	5040 x 2100 mm
	3000 kg	14"	760 mm	2410 kg	5040 x 2100 mm
		13"	630 mm	2450 kg	5040 x 2100 mm
		10"	570 mm	2450 kg	5040 x 2100 mm
	3500 kg	14"	780 mm	2830 kg	5060 x 2100 mm
		13"	640 mm	2810 kg	5060 x 2100 mm
4260 x 1750 x 350 mm	2000 kg	13"	690 mm	1470 kg	5640 x 1810 mm
		10"	570 mm	1490 kg	5640 x 1810 mm
	2600 kg	14"	700 mm	2030 kg	5640 x 1810 mm
		13"	630 mm	2060 kg	5640 x 1810 mm
		10"	570 mm	2060 kg	5640 x 1810 mm
	3000 kg	14"	760 mm	2410 kg	5640 x 1810 mm
		13"	630 mm	2450 kg	5640 x 1810 mm
		10"	570 mm	2450 kg	5640 x 1810 mm
	3500 kg	14"	780 mm	2830 kg	5660 x 1810 mm
		13"	640 mm	2840 kg	5660 x 1810 mm
4260 x 2040 x 350 mm	2000 kg	13"	690 mm	1440 kg	5640 x 2100 mm
		10"	570 mm	1460 kg	5640 x 2100 mm
	2600 kg	14"	700 mm	2000 kg	5640 x 2100 mm
		13"	630 mm	2030 kg	5640 x 2100 mm
		10"	570 mm	2030 kg	5640 x 2100 mm
	3000 kg	14"	760 mm	2370 kg	5640 x 2100 mm
		13"	630 mm	2410 kg	5640 x 2100 mm
		10"	570 mm	2410 kg	5640 x 2100 mm
	3500 kg	14"	780 mm	2790 kg	5660 x 2100 mm
		13"	640 mm	2810 kg	5660 x 2100 mm
4260 x 2440 x 350 mm	2000 kg	13"	690 mm	1390 kg	5640 x 2500 mm
		10"	570 mm	1410 kg	5640 x 2500 mm
	2600 kg	14"	700 mm	1940 kg	5640 x 2500 mm
		13"	630 mm	1970 kg	5640 x 2500 mm
		10"	570 mm	1970 kg	5640 x 2500 mm
	3000 kg	14"	760 mm	2320 kg	5640 x 2500 mm
		13"	630 mm	2360 kg	5640 x 2500 mm
		10"	570 mm	2360 kg	5640 x 2500 mm
	3500 kg	14"	780 mm	2720 kg	5660 x 2500 mm
		13"	640 mm	2740 kg	5660 x 2500 mm

Platform trailer type GTP



Platform trailer type GTP



Internal dimensions L x W x H	perm. GVW	Tyres	Loading height	Payload	External dimensions L x W
4860 x 2040 x 350 mm	2600 kg	14"	730 mm	1940 kg	6240 x 2100 mm
		13"	630 mm	1980 kg	6240 x 2100 mm
		10"	570 mm	1980 kg	6240 x 2100 mm
	3000 kg	14"	760 mm	2320 kg	6240 x 2100 mm
		13"	630 mm	2360 kg	6240 x 2100 mm
		10"	570 mm	2360 kg	6240 x 2100 mm
	3500 kg	14"	780 mm	2750 kg	6260 x 2100 mm
		13"	640 mm	2760 kg	6260 x 2100 mm
4860 x 2440 x 350 mm	2600 kg	14"	730 mm	1890 kg	6240 x 2500 mm
		13"	630 mm	1920 kg	6240 x 2500 mm
		10"	570 mm	1920 kg	6240 x 2500 mm
	3000 kg	14"	760 mm	2270 kg	6240 x 2500 mm
		13"	630 mm	2310 kg	6240 x 2500 mm
		10"	570 mm	2310 kg	6240 x 2500 mm
	3500 kg	14"	780 mm	2690 kg	6260 x 2500 mm
		13"	640 mm	2700 kg	6260 x 2500 mm
5460 x 2040 x 350 mm	2600 kg	14"	730 mm	1840 kg	6840 x 2100 mm
		13"	640 mm	1850 kg	6840 x 2100 mm
		10"	610 mm	1960 kg	6840 x 2100 mm
	3000 kg	14"	760 mm	2220 kg	6840 x 2100 mm
		13"	640 mm	2230 kg	6840 x 2100 mm
		10"	610 mm	2230 kg	6840 x 2100 mm
	3500 kg	14"	780 mm	2640 kg	6860 x 2100 mm
		13"	650 mm	2650 kg	6860 x 2100 mm
5460 x 2440 x 350 mm	2600 kg	14"	730 mm	1840 kg	6840 x 2500 mm
		13"	640 mm	1830 kg	6840 x 2500 mm
		10"	610 mm	1780 kg	6840 x 2500 mm
	3000 kg	14"	760 mm	2160 kg	6840 x 2500 mm
		13"	640 mm	2170 kg	6840 x 2500 mm
		10"	610 mm	2170 kg	6840 x 2500 mm
	3500 kg	14"	780 mm	2580 kg	6860 x 2500 mm
		13"	650 mm	2590 kg	6860 x 2500 mm
6060 x 2040 x 350 mm	2600 kg	14"	730 mm	1820 kg	7440 x 2100 mm
		13"	640 mm	1830 kg	7440 x 2100 mm
		10"	610 mm	1830 kg	7440 x 2100 mm
	3000 kg	14"	760 mm	2190 kg	7440 x 2100 mm
		13"	640 mm	2210 kg	7440 x 2100 mm
		10"	610 mm	2210 kg	7440 x 2100 mm
	3500 kg	14"	780 mm	2620 kg	7460 x 2100 mm
		13"	650 mm	2630 kg	7460 x 2100 mm
6060 x 2440 x 350 mm	2600 kg	14"	730 mm	1730 kg	7440 x 2500 mm
		13"	640 mm	1730 kg	7440 x 2500 mm
		10"	610 mm	1730 kg	7440 x 2500 mm
	3000 kg	14"	760 mm	2110 kg	7440 x 2500 mm
		13"	640 mm	2120 kg	7440 x 2500 mm
		10"	610 mm	2150 kg	7440 x 2500 mm
	3500 kg	14"	780 mm	2520 kg	7460 x 2500 mm
		13"	650 mm	2530 kg	7460 x 2500 mm
	3500 kg	14"	780 mm	2720 kg	5660 x 2500 mm
		13"	640 mm	2740 kg	5660 x 2500 mm



Vertically adjustable drawbar



Balanced aluminium wheels



Automatic drawbar castor wheel



Lashing ring under the load floor



Canvas and frame with various loading heights and canvas colours



Hook fasteners



View of the inside of the aluminium panel extension



Long-lasting stainless steel fastener



Recessed lashing point



Side curtain



Two-row H-frame



Aluminium lid with gas spring raising support (up to 3060 x 1750 mm)



Sturdy supports for a safe stance



Fixture for access rails under the load floor

Turntable trailer type GDP



Internal dimensions L x W x H	Axles	perm. GVW	Tyres	Loading height	Payload	External dimensions L x W
4860 x 2040 x 350 mm	2	3000 kg	10"	700 mm	2135 kg	6670 x 2100 mm
		3500 kg	14"	870 mm	2560 kg	6670 x 2100 mm
			13"	740 mm	2570 kg	6670 x 2100 mm
4860 x 2440 x 350 mm	2	3000 kg	10"	700 mm	2095 kg	6670 x 2500 mm
		3500 kg	14"	870 mm	2520 kg	6670 x 2500 mm
			13"	740 mm	2530 kg	6670 x 2500 mm
5460 x 3040 x 350 mm	2	3000 kg	10"	700 mm	2040 kg	7270 x 2100 mm
		3500 kg	14"	870 mm	2460 kg	7270 x 2100 mm
			13"	740 mm	2470 kg	7270 x 2100 mm
	3	3500 kg	14"	860 mm	2440 kg	7270 x 2100 mm
			10"	700 mm	2485 kg	7270 x 2100 mm
	4	3500 kg	14"	860 mm	2420 kg	7270 x 2100 mm
			10"	700 mm	2465 kg	7270 x 2100 mm
	2	3000 kg	10"	700 mm	1990 kg	7270 x 2500 mm
		3500 kg	14"	870 mm	2410 kg	7270 x 2500 mm
			13"	740 mm	2420 kg	7270 x 2500 mm
5460 x 2440 x 350 mm	3	3500 kg	14"	860 mm	2390 kg	7270 x 2500 mm
			10"	700 mm	2435 kg	7270 x 2500 mm
			14"	860 mm	2370 kg	7270 x 2500 mm
	4	3500 kg	14"	860 mm	2370 kg	7270 x 2500 mm
			10"	700 mm	2415 kg	7270 x 2500 mm
	2	3000 kg	10"	700 mm	1980 kg	7870 x 2100 mm
		3500 kg	14"	870 mm	2400 kg	7870 x 2100 mm
			13"	740 mm	2410 kg	7870 x 2100 mm
6060 x 2040 x 350 mm	3	3500 kg	14"	860 mm	2380 kg	7870 x 2100 mm
			10"	700 mm	2425 kg	7870 x 2100 mm
	4	3500 kg	14"	860 mm	2360 kg	7870 x 2100 mm
			10"	700 mm	2405 kg	7870 x 2100 mm
	2	3000 kg	10"	700 mm	1980 kg	7870 x 2100 mm
		3500 kg	14"	870 mm	2400 kg	7870 x 2100 mm

Too big for a van but not enough for a truck? We have the perfect trailer for the job! With our turntable trailer type GDP you are well equipped for exactly this type of load. A special size and an additional stake pocket in the centre? No problem! Thanks to the numerous range of special equipment options we have available, we can make your trailer just as special as the load it has to carry.

Side marker, clearance lights and contour lamps in LED technology with powerful luminance and a long service life.

8-16 recessed lashing points in the load floor and an additional 8-16 lashing rings fitted under the platform with 600 kg tensile strength each for flexible load securing.

Completely drop-down and removable aluminium panels for versatile loading options with sturdy and rust-resistant fasteners made of stainless steel.



Undercarriage versions with 2, 3 or 4 axles. High-quality axle and brake components from renowned manufacturers. Automatic readjustment of the brake for safe driving behaviour and a shorter braking distance

Lamps and cable conduit are installed protected (cable conduit in the hollow profile). This reduces maintenance costs and increases service life.

Sturdy V-shaped drawbar with vertical adjustment feature mounted on welded turntable for effortless attachment and detachment at the traction vehicle.



Canvas and frame



Stake pockets with plug-in stakes

Internal dimensions L x W x H	Axles	perm. GVW	Tyres	Loading height	Payload	External dimensions L x W
6060 x 2440 x 350 mm	2	3000 kg	10"	700 mm	1930 kg	7870 x 2500 mm
		3500 kg	14"	870 mm	2350 kg	7870 x 2500 mm
			13"	740 mm	2360 kg	7870 x 2500 mm
	3	3500 kg	14"	860 mm	2330 kg	7870 x 2500 mm
			10"	700 mm	2375 kg	7870 x 2500 mm
	4	3500 kg	14"	860 mm	2310 kg	7870 x 2500 mm
			10"	700 mm	2355 kg	7870 x 2500 mm
7260 x 2040 x 350 mm	2	3000 kg	10"	700 mm	1885 kg	9070 x 2100 mm
		3500 kg	14"	870 mm	2300 kg	9070 x 2100 mm
			13"	740 mm	2310 kg	9070 x 2100 mm
	3	3500 kg	14"	860 mm	2280 kg	9070 x 2100 mm
			10"	700 mm	2330 kg	9070 x 2100 mm
	4	3500 kg	14"	860 mm	2260 kg	9070 x 2100 mm
			10"	700 mm	2310 kg	9070 x 2100 mm
7260 x 2440 x 350 mm	2	3000 kg	10"	700 mm	1825 kg	9070 x 2500 mm
		3500 kg	14"	870 mm	2240 kg	9070 x 2500 mm
			13"	740 mm	2250 kg	9070 x 2500 mm
	3	3500 kg	14"	860 mm	2220 kg	9070 x 2500 mm
			10"	700 mm	2270 kg	9070 x 2500 mm
	4	3500 kg	14"	860 mm	2200 kg	9070 x 2500 mm
			10"	700 mm	2250 kg	9070 x 2500 mm
8460 x 2040 x 350 mm	2	3000 kg	10"	700 mm	1790 kg	10270 x 2100 mm
		3500 kg	14"	870 mm	2200 kg	10270 x 2100 mm
			13"	740 mm	2210 kg	10270 x 2100 mm
	3	3500 kg	14"	860 mm	2180 kg	10270 x 2100 mm
			10"	700 mm	2235 kg	10270 x 2100 mm
	4	3500 kg	14"	860 mm	2160 kg	10270 x 2100 mm
			10"	700 mm	2215 kg	10270 x 2100 mm
8460 x 2440 x 350 mm	2	3000 kg	10"	700 mm	1710 kg	10270 x 2500 mm
		3500 kg	14"	870 mm	2120 kg	10270 x 2500 mm
			13"	740 mm	2130 kg	10270 x 2500 mm
	3	3500 kg	14"	860 mm	2100 kg	10270 x 2500 mm
			10"	700 mm	2155 kg	10270 x 2500 mm
	4	3500 kg	14"	860 mm	2080 kg	10270 x 2500 mm
			10"	700 mm	2135 kg	10270 x 2500 mm
9660 x 2040 x 350 mm	2	3000 kg	10"	700 mm	1535 kg	11470 x 2100 mm
		3500 kg	14"	870 mm	1940 kg	11470 x 2100 mm
			13"	740 mm	1950 kg	11470 x 2100 mm
	3	3500 kg	14"	860 mm	1920 kg	11470 x 2100 mm
			10"	700 mm	1980 kg	11470 x 2100 mm
	4	3500 kg	14"	860 mm	1900 kg	11470 x 2100 mm
			10"	700 mm	1960 kg	11470 x 2100 mm
9660 x 2440 x 350 mm	2	3000 kg	10"	700 mm	1435 kg	11470 x 2500 mm
		3500 kg	14"	870 mm	1840 kg	11470 x 2500 mm
			13"	740 mm	1850 kg	11470 x 2500 mm
	3	3500 kg	14"	860 mm	1880 kg	11470 x 2500 mm
			10"	700 mm	1940 kg	11470 x 2500 mm
	4	3500 kg	14"	860 mm	1860 kg	11470 x 2500 mm
			10"	700 mm	1920 kg	11470 x 2500 mm

Turntable trailer type GDP





Long-lasting stainless steel fastener



Hook fasteners



Recessed lashing point



Two-row H-frame



Drawbar with turntable bearing



Canvas and frame in various loading heights and canvas colours



Access rails with fixture under the load floor



Electric cable winch



Cranked support



4-axle with box body



Lifting platform attachment



Version without panels



Special version for vehicle transport



Lighting rail extendable



Non-slip plate for access rails



Side curtain



Higher tailboard



Stake pockets with plug-in stakes



Centre stake removable




Tool box fitted under the load floor



Canvas awning in conjunction with box body

Long material trailer type LM

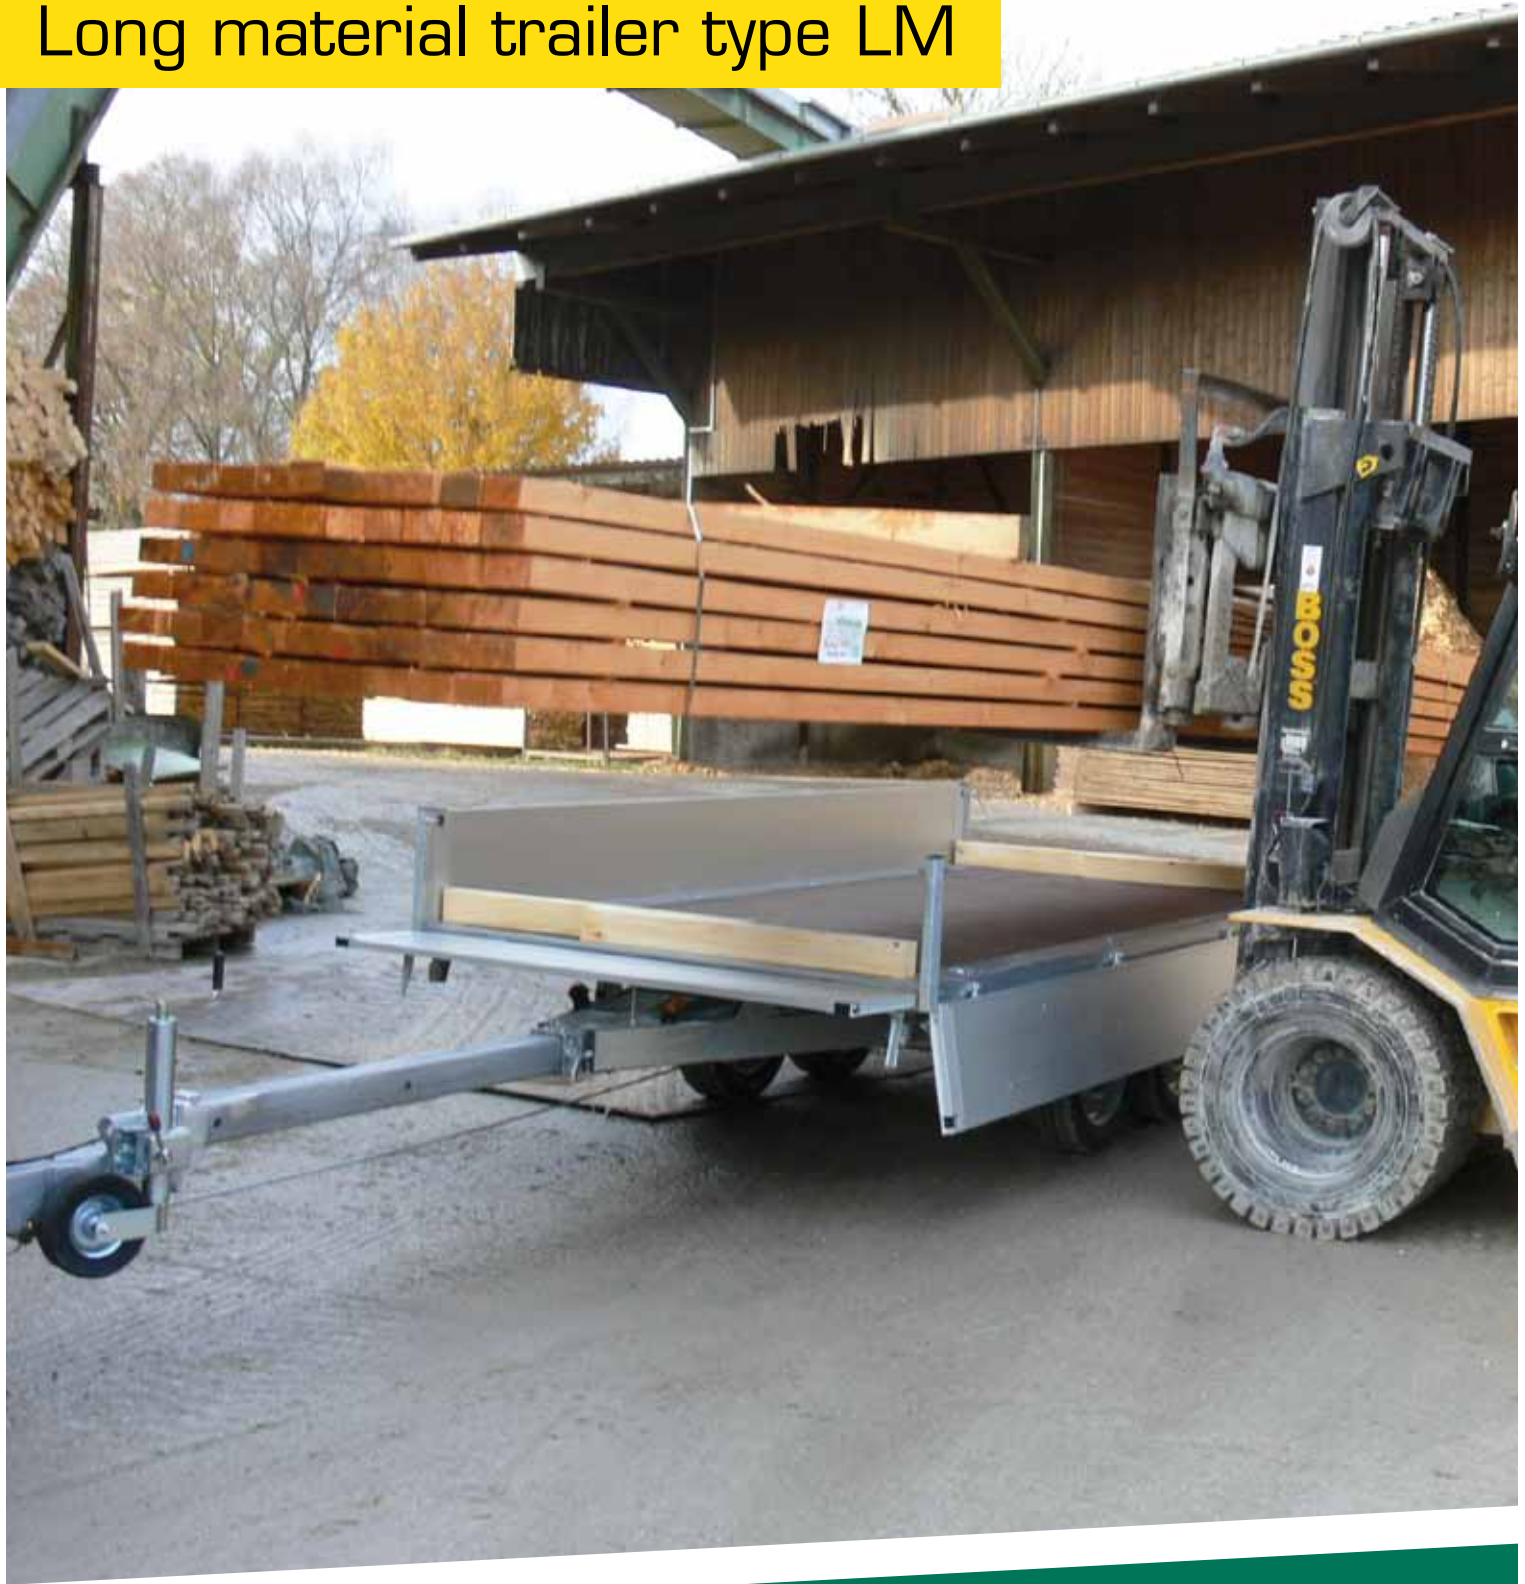

Internal dimensions L x W x H	perm. GVW	Tyres	Loading height	Payload	External dimensions L x W
3660 x 1750 x 350 mm	2600 kg	14"	730 mm	1950 kg	5280 x 1810 mm
	3500 kg	14"	780 mm	2740 kg	5470 x 1810 mm
4260 x 2040 x 350 mm	2600 kg	14"	730 mm	1890 kg	5880 x 2100 mm
	3500 kg	14"	780 mm	2650 kg	6070 x 2100 mm
4860 x 2040 x 350 mm	2600 kg	14"	730 mm	1830 kg	6480 x 2100 mm
	3500 kg	14"	780 mm	2610 kg	6670 x 2100 mm
5460 x 2040 x 350 mm	2600 kg	14"	730 mm	1750 kg	7080 x 2100 mm
	3500 kg	14"	780 mm	2530 kg	7270 x 2100 mm

! Our long material trailer type LM is the ideal solution for all those who want to remain flexible in terms of load length. The tubular drawbar can be extended without the use of tools, enabling long goods to be transported easily or standard freight as with a platform trailer.

8 recessed lashing points in the load floor and an additional 8 lashing rings fitted under the platform with 600 kg tensile strength each for flexible load securing.

Completely drop-down and removable aluminium panels for versatile loading options with sturdy and rust-resistant fasteners made of stainless steel.

Side marker, clearance lights and contour lamps using LED technology with powerful luminance and a long service life.



High-quality axle and brake components from renowned manufacturers. Automatic readjustment of the brake for safe driving behaviour and a shorter braking distance

Lamps and cable conduit are installed protected (cable conduit in the hollow profile). This reduces maintenance costs and increases service life.

Tubular drawbar can be extended to up to 3100 mm without tools and without the brake and lighting equipment having to be converted in any way.



Extendable lighting rail



Sturdy support for long goods



Maximum drawbar length of 3100 mm in standard version



Stake pockets with plug-in stakes



Mesh sides and drawbar in special length



Canvas and frame in various loading heights and canvas colours



Support can be mounted in different positions on the drawbar as required



Drawbar extendable (without tools)



Simple and safe handling

Rear tipper type PHK/UHK



Internal dimensions L x W x H	perm. GVW	Tyres	Loading height	Payload	External dimensions L x W
2300 x 1500 x 300 mm (Stahlboden)	1350 kg	10"	630 mm	940 kg	3625 x 1570 mm
		13"	700 mm	940 kg	3625 x 1570 mm
	1500 kg	10"	630 mm	1135 kg	3625 x 1570 mm
		13"	700 mm	1135 kg	3625 x 1570 mm
2760 x 1500 x 350 mm (Stahl- oder Holzboden)	1800 kg	13"	710 mm	1240 kg	4200 x 1660 mm
	2600 kg	14"	750 mm	1970 kg	4200 x 1660 mm

Our rear tippers type PHK/UHK combine the versatile application possibilities of our platform trailers with the strength- and time-saving tipping function for unloading bulk goods. This makes them useful both for trade enterprises and private purposes.

Recessed lashing points in the load floor and additional lashing rings fitted under the platform with 600 kg tensile strength each for flexible load securing.

Grain-tight, completely drop-down and removable aluminium panels for loss-free and versatile transport. Sturdy and rust-resistant fasteners made of stainless steel.

Load floor made completely of galvanised sheet steel for convenient unloading and easy cleaning.

Hydraulic tipping mechanism with manual pump and powerful hydraulic cylinder for easy tipping of the transported goods.

Lamps and cable conduit are installed protected (cable conduit in the hollow profile). This reduces maintenance costs and increases service life.



UHK version with wooden floor



Sturdy and welded frame structure



Long-lasting stainless steel fastener



E-hydraulics with emergency manual pump



Manual pump with hydraulic tipping mechanism



Sturdy support



Drop-down aluminium panels



Optimum tipping angle



Steel floor with recessed lashing rings



Recessed lashing point (wooden floor)



Lashing rings (steel floor)



Mesh sides (swing-mounted on 4 sides)

Three-way tipper type UDK



Internal dimensions L x W x H	perm. GVW	Tyres	Loading height	Payload	External dimensions L x W
2760 x 1500 x 350 mm (steel or wooden floor)	1800 kg	13"	710 mm	1205 kg	4200 x 1660 mm
	2600 kg	14"	750 mm	1960 kg	4200 x 1660 mm
		13"	710 mm	1965 kg	4200 x 1660 mm
3060 x 1750 x 350 mm (steel or wooden floor)	2600 kg	14"	750 mm	1920 kg	4500 x 1910 mm
		13"	710 mm	1940 kg	4500 x 1910 mm
	3000 kg	14"	780 mm	2330 kg	4500 x 1910 mm
		13"	710 mm	2350 kg	4500 x 1910 mm
	3500 kg	14"	790 mm	2730 kg	4520 x 1910 mm
		13"	720 mm	2740 kg	4520 x 1910 mm
3060 x 2040 x 350 mm (wooden floor)	2600 kg	14"	750 mm	1890 kg	4500 x 2200 mm
		13"	710 mm	1900 kg	4500 x 2200 mm
	3000 kg	14"	780 mm	2260 kg	4500 x 2200 mm
		13"	710 mm	2290 kg	4500 x 2200 mm
	3500 kg	14"	790 mm	2690 kg	4520 x 2200 mm
		13"	720 mm	2710 kg	4520 x 2200 mm
3660 x 1750 x 350 mm (steel or wooden floor)	2600 kg	14"	750 mm	1830 kg	5100 x 1910 mm
		13"	710 mm	1850 kg	5100 x 1910 mm
	3000 kg	14"	780 mm	2210 kg	5100 x 1910 mm
		13"	710 mm	2230 kg	5100 x 1910 mm
	3500 kg	14"	790 mm	2650 kg	5120 x 1910 mm
		13"	720 mm	2680 kg	5120 x 1910 mm
3660 x 2040 x 350 mm (wooden floor)	2600 kg	14"	750 mm	1780 kg	5100 x 2200 mm
		13"	710 mm	1800 kg	5100 x 2200 mm
	3000 kg	14"	780 mm	2180 kg	5100 x 2200 mm
		13"	710 mm	2200 kg	5100 x 2200 mm
	3500 kg	14"	790 mm	2630 kg	5120 x 2200 mm
		13"	720 mm	2650 kg	5120 x 2200 mm
4260 x 2040 x 350 mm (wooden floor)	2600 kg	14"	750 mm	1740 kg	5700 x 2200 mm
		13"	710 mm	1760 kg	5700 x 2200 mm
	3000 kg	14"	780 mm	2140 kg	5700 x 2200 mm
		13"	710 mm	2160 kg	5700 x 2200 mm
	3500 kg	14"	790 mm	2560 kg	5720 x 2200 mm
		13"	720 mm	2570 kg	5720 x 2200 mm

Our three-way tipper has been developed for the professional and industrial transport of goods such as gravel, sand and cuttings. It is the ideal helper for craftsmen's day-to-day work and masters all challenges in no time. Numerous accessories and many special equipment options such as access ramps for construction machinery mean there are no limits to the range of applications.

6-8 recessed lashing points in the load floor and an additional 6-8 lashing rings fitted under the platform with 600 kg tensile strength each for flexible load securing.

Grain-tight, completely drop-down and removable aluminium panels for loss-free and versatile transport. Sturdy hook fasteners for easy handling – ideal for bulk goods

Load floor made completely of galvanised sheet steel for convenient unloading and easy cleaning.



Electro-hydraulics with emergency manual pump for easy load tipping. Cylinder with high-quality protective coating for long-term use.

Lamps and cable conduit are installed protected (cable conduit in the hollow profile). This reduces maintenance costs and increases service life.



Remote control can be retrofitted easily at any time.



Powerful E-hydraulics with high-quality trickle charger



Pluggable steel corner stakes



Hook fasteners



E-hydraulics with emergency manual pump



Recessed stainless steel fastener



Lashing ring under the load floor



Optimum tipping angle



Sturdy and welded frame structure with optimum payload ratio



Mesh sides (swing-mounted on 4 sides)



Recessed lashing point (wooden floor)



Lashing rings (steel floor)



Swing-mounted panel



Sturdy support



E-hydraulics installed protected



E-hydraulics operating unit can be locked



E-hydraulics and access rails



High-frequency charger with trickling charge function



Extendable access rails with clamping fixture under the load floor



Swing-mounted panel fastener



Storage box mounted on the tailboard



Numerous accessory options



Universal loading options



Self-adjusting brake as standard feature



Many model versions (size, weight, tyre set)



Canvas and frame in various loading heights and canvas colours



Wheel chock



Tipping bearing



Steel floor



Version with wooden floor



Aluminium panel extension



Panel extension made of the same aluminium profile as the basic panel



Access rail

Special equipment/accessories



Box lock



Ball-shaped coupling with safety ball



Soft dock



Safety ball + cylinder lock



Adapter connector 12 V 13/7-pole



Hoop lock as theft protection



Lashing strap



Wheel-securing strap



Tool/storage box made of plastic



Tool/storage box made of plastic



Safety cover as theft protection



AKS safety coupling



Concentrate on your success, we will deliver you time-saving, efficient and durable trailers in best workmanship quality – tailor-made to your wishes.

At UNSINN, quality means that our customers may expect perfect results. Every trailer is a first-class product thanks to our careful and precise work. The quality of all the individual components used – sourced from carefully selected suppliers – allows

UNSINN to manufacture top-quality trailers which you will enjoy working with for a long time. Rounded off by the best personal service from motivated employees, we provide excellent support right from the word go. Our high company standard has also been officially confirmed.

UNSINN has been awarded the Bavarian State Prize several times and included in "Bavaria's Best 50" twice. We have also been awarded the Anton-Jaumann Prize, category Special Trade.

For all those customers who have not been able to find (quite) the right product in our comprehensive range, we have our creative specialists on hand to help fulfil their requirements. There are (almost) no limits to flexibility to create a unique product. We will be happy to design and manufacture your one-off customised trailer for you.

You get your very own personal trailer, that marches to its own – your – tune. We are happy to face any challenge and fulfil the sometimes quite exotic wishes of our customers.

That's what makes us stand out from the rest. And is the reason why there is increasing international demand for our work.



UNSINN Fahrzeugtechnik GmbH
Rainer Straße 23
86684 Holzheim
Germany

info@unsinn.de
www.unsinn.de

All technical data, dimensions and weight specifications etc.
are approximate and non-binding. Some illustrations
include accessories. We reserve the right to make changes.
Reproduction prohibited.
Photos: UNSINN Fahrzeugtechnik GmbH.